



Ningbo Yule Import and Export Co., Ltd.

Tel: +86 18357464511

Email: info@nb-yule.com

Web: www.nb-yule.com


Add: Room906, No.666 Dongyi North Road, Zhenghai, Ningbo,China



FIREPLACE COLLECTIONS



WALL-MOUNTED SERIES

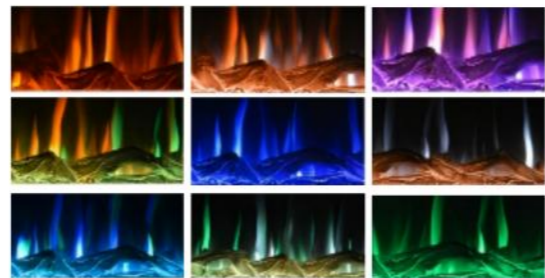

YL-IF1350T



Model No.	Heat Power	Product Size (mm)	Packing Size (mm)	N.W.(Kg)	G.W.(Kg)
YL-IF1350T	900W/1800W for 220V-240V/50Hz; 750W/1500W for 120V/60Hz	1270×121×502	1358×185×580	21	23

- 50" Wall Mounted Fireplace
- Carbon log fuel effect
- Flat tempered glass front panel
- Adjustable temperature settings from 62°F to 82°F(17°C-28°C)
- Adjustable flame brightness (L1 to L5)
- Timer offers automatic shut off from 1H to 8H
- Flame and stone bed with 9 changable LED colours
- Alternative manual control panel
- With touch panel control
- Flame effect can be used independently
- Remote control
- Vent at bottom of front panel
- With safety thermal cut-off device



- 36"&40"&50"&60"&70" Wall Mounted Fireplace
- Crystal stone /log/pebble fuel effect
- Flat Tempered glass front panel
- LED lights
- Alternative manual control panel
- with digital led display
- 2 heat settings
- Adjustable flame brightness (L1 to L5)
- Timer offers automatic shut off from 1H to 8H
- Adjustable temperature settings from 62°F to 82°F(17°C-28°C)
- Stone bed and flame with 3changable led colour
- Remote control
- With safety cut-off device

YL-WF00FSB

Model No.	Heat Power	Product Size (mm)	Packing Size (mm)	N.W.(Kg)	G.W.(Kg)
YL-WF36FSB	900W/1800W for 220V-240V/50Hz; 750W/1500W for 120V/60Hz	915×120×466	1002×185×543	15.8	17.9
YL-WF40FSB		1016×120×466	1104×185×543	16.8	19.2
YL-WF50FSB		1270×120×466	1358×185×543	20.8	23.3
YL-WF60FSB		1524×120×466	1612×185×543	23.6	26.6
YL-WF70FSB		1778×120×466	1866×185×543	26.8	30.3



- 36"&40"&50"&60"&70" Wall Mounted fireplace
- Crystal stone /log/pebble fuel effect
- Flat tempered glass front panel
- LED lights
- Alternative manual control panel
- With digital LED display
- two heat settings
- Adjustable flame brightness (L1 to L5)
- Timer offers automatic shut off from 1H to 8H
- Adjustable temperature settings from 62°F to 82°F(17°C-28°C)
- Stone bed and flame with 3 chanble LED colour
- Remote control
- With safety cut-off device

YL-WF1300

Model No.	Heat Power	Product Size (mm)	Packing Size (mm)	N.W.(Kg)	G.W.(Kg)
YL-WF1336	900W/1800W for 220V-240V/50Hz; 750W/1500W for 120V/60Hz	915×132×450	995×195×528	16.5	18.5
YL-WF1340		1016×132×450	1097×195×528	17.5	18.7
YL-WF1350		1270×132×450	1351×195×528	19.2	21
YL-WF1360		1524×132×450	1605×195×528	23.6	25.6
YL-WF1370		1778×132×450	1860×195×528	27.8	30.6

YL-WF1350

- 50" Wall Mounted Fireplace
- Carbon log fuel effect
- flat tempered glass front panel
- LED lights
- Alternative manual control panel
- with digital led display
- Remote control
- Vent at bottom
- Flame and fuelbed with adjustable brightness (L1 to L5)
- Timer offers automatic shut off from 1H to 8H
- Adjustable temperature settings form 62°F to 82°F(17°C-28°C)
- With safety cut-off device



Modle No.	Heat Power	Proudct Size (mm)	Packing Size (mm)	N.W.(Kg)	G.W.(Kg)
YL-WF1350	900W/1800W for 220V-240V/50Hz; 750W/1500W for 120V/60Hz	1270×140×551	1346×200×635	20.3	22.3

YL-EF11BL



- 35" Wall mounted electric fireplace
- White pebble or Carbon log fuel effect
- Flat front tempered glass front panel
- Adjustable flame brightness
- Alternative manual control panel
- Flame effect can be used independently
- Remote control for choice
- with back led lights (orange, red, blue)
- Safety thermal cut-off device
- With remote
- Plastic base is available

Modle No.	Heat Power	Proudct Size (mm)	Packing Size (mm)	N.W.(Kg)	G.W.(Kg)
YL-EF11BL	900W/1800W for 220V-240V/50Hz; 750W/1500W for 120V/60Hz	880×150×560	960×204×650	14.5	16.5

YL-EF11



- 26" & 35" Wall Mounted Fireplace
- Carbon log or Pebble fuel effect
- Black curved tempered glass front panel
- Adjustable flame brightness
- Alternative manual control panel
- Flame effect can be used independently
- Remote control for choice
- Safety thermal cut-off device
- With remote
- Plastic base is available

Modle No.	Heat Power	Proudct Size (mm)	Packing Size (mm)	N.W.(Kg)	G.W.(Kg)
YL-EF11A	900W/1800W for 220V-240V/50Hz; 750W/1500W for 120V/60Hz	880×150×560	960×204×650	14.5	16.5
YL-EF11C		600×130×520	737×215×580	10.5	13.8

YL-EF28G



- 28" Wall Mounted Fireplace
- Carbon log fuel effect
- Flat tempered glass front panel
- LED lights
- Alternative manual control panel
- Flame and fuelbed with adjustable brightness (L1 to L5)
- Two heat settings
- Remote control
- Vent at front
- With safety cut-off device

Modle No.	Heat Power	Proudct Size (mm)	Packing Size (mm)	N.W.(Kg)	G.W.(Kg)
YL-EF28G	900W/1800W for 220V-240V/50Hz; 750W/1500W for 120V/60Hz	711×207×438	795×260×515	15.6	17.8

YL-IF1300


- Insert Electric Fireplace+ Wall mounted 36" & 42" & 50"
- Carbon log or Crystal stone fuel effect 2 in 1
- black iron border, with a tempered glass
- Patented LED flame effect
- 2 heating setting option
- With digital display
- Adjustable temperature settings from 16°C to 28°C
- Adjustable timer settings from 1H to 8H
- 5 settings for brightness of flame and fuelbed
- With 9 flame changeable flame color



Modle No.	Heat Power	Proudct Size (mm)	Packing Size (mm)	N.W.(Kg)	G.W.(Kg)
YL-IF1336	900W/1800W for 220V-240V/50Hz; 750W/1500W for 120V/60Hz	915×141×450	1095×225×590	18	22
YL-IF1342		1067×141×450	1255×235×605	20	24
YL-IF1350		1270×141×450	1460×235×605	26	30

YL-ZCR0013

- 40" & 50" & 60" Wall Mounted+Freestanding Fireplace
- Crystal fuel effect
- Flat steel and tempered glass for front panel
- Led lights
- Alternative manual control panel
- LED digital display
- Adjustable temperature settings from 62°F to 82°F(17°C-28°C)
- Adjustable flame brightness (L1 to L5)
- Adjust timer from 1H to 8H
- Flame and stonebed with 9 changable led colour
- Remot control
- Safety cut-off devic
- Feet is available (with metal feet)

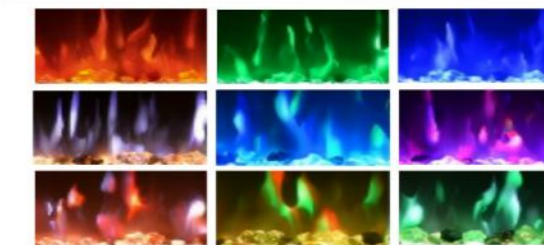

Modle No.	Heat Power	Proudct Size (mm)	Packing Size (mm)	N.W.(Kg)	G.W.(Kg)
YL-ZCR4013	900W/1800W for 220V-240V/50Hz; 750W/1500W for 120V/60Hz	1016×119×327	1118×203×427	17.7	21.4
YL-ZCR5013		1270×119×327	1372×203×427	21	25.5
YL-ZCR6013		1524×119×327	1626×203×427	25	27.3



YL-IF1300B



- 31" & 32" & 36" Wall Recessed +Wall Mounted Fireplace
- Crystal stone & Carbonlog fuel effect
- Flat tempered glass front panel
- LED lights
- Alternative manual control panel
- With digital display
- Adjustable temperature settings from 62°F to 82°F (17°C-28°C)
- Stone bed with 4 changeable led colour (orange, red, blue white)
- With safety cut-off device
- Remote control including

Model No.	Heat Power	Product Size (mm)	Packing Size (mm)	N.W.(Kg)	G.W.(Kg)
YL-IF1331B	900W/1800W for 220V-240V/50Hz;	809×142×425	857×190×487	11.75	13.2
YL-IF1332B	750W/1500W for 120V/60Hz	860×142×425	905×190×487	11.9	13.7
YL-IF1336B		950×151×450	1010×190×487	17.5	19.2

YL-IF00FSB



- 40" & 50" & 60" & 70" Wall Recessed +Wall Mounted Fireplace
- Crystal stone & carbon log fuel effect
- Flat tempered glass front panel
- LED lights
- Alternative manual control panel
- With digital LED display
- Adjust timer from 1H to 8H
- Adjustable temperature setting from 62°F to 82°F (17°C-28°C)
- Flame with 3 changeable led colour (Red, blue, red & blue)
- Remote control
- With safety cut-off device

Model No.	Heat Power	Product Size (mm)	Packing Size (mm)	N.W.(Kg)	G.W.(Kg)
YL-IF40FSB	900W/1800W for 220V-240V/50Hz;	1016×120×466	1101×195×558	14.4	19
YL-IF50FSB	750W/1500W for 120V/60Hz	1270×120×466	1368×195×558	19.5	25
YL-IF60FSB		1524×120×466	1609×195×558	24.5	28.5
YL-IF70FSB		1778×120×466	1880×195×558	27.5	32.5

YL-IF1300G



- 40" & 50" & 60" & 70" Wall Recessed +Wall Mounted Fireplace
- Crystal stone & carbon log fuel effect
- Flat tempered glass front panel, front heating
- Adjustable flame brightness (L1 to L5)
- With 9 different flame colour
- LED digital display
- Adjust timer from 1H to 8H
- Adjustable temperature setting from 62°F to 82°F (17°C-28°C)
- Alternative manual control panel
- Remote control for choiced light
- Led light

Model No.	Heat Power	Product Size (mm)	Packing Size (mm)	N.W.(Kg)	G.W.(Kg)
YL-IF1340G	900W/1800W for 220V-240V/50Hz;	1019×141×431	1125×205×512	17.8	20.4
YL-IF1350G	750W/1500W for 120V/60Hz	1270×141×431	1380×205×512	20.8	23
YL-IF1360G		1524×141×431	1633×205×512	26	29.5
YL-IF1370G		1778×141×431	1888×205×512	29.5	34






- 36" & 40" & 50" & 60" & 70" Wall Recessed + Wall Mounted + Freestanding (3 in 1)
- Crystal stone & Carbon log fuel effect
- Flat tempered glass front panel (black or white color for your choice)
- LED lights
- Alternative manual control panel
- with digital LED display
- Adjustable flame brightness (L1 to L5)
- Adjust timer from 1H to 8H
- Remote control
- Flame and stone bed with 9 changeable LED colour (yellow, green, blue, white, yellow & green, yellow & blue, yellow & white, green & blue, green & white)
- with safety cut-off device
- with metal feet for choice



YL-IF1300TCL

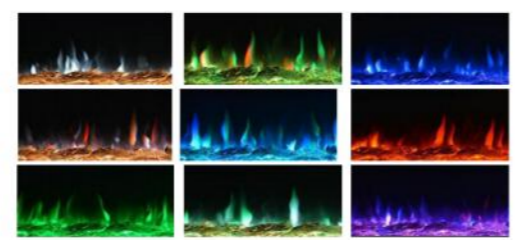

Model No.	Heat Power	Product Size (mm)	Packing Size (mm)	N.W.(Kg)	G.W.(Kg)
YL-IF1336TCL	900W/1800W for 220V-240V/50Hz; 750W/1500W for 120V/60Hz	915×140×546	995×220×628	14.8	16.7
YL-IF1340TCL		1016×140×546	1096×220×628	15.8	18.2
YL-IF1350TCL		1270×140×546	1350×220×628	20.9	24.5
YL-IF1360TCL		1524×140×546	1604×220×628	24	26.7
YL-IF1370TCL		1778×140×546	1858×220×628	32	35.5



YL-SL50B



- 50" Wall Recessed + Wall Mounted Electric Fireplace
- Carbon log fuel effect
- 2 heat setting
- Adjustable temperature settings from 65°F to 100°F (18°C to 38°C)
- 9 kinds of flame colour
- Adjustable brightness of flame and fuel bed (L1 to L4)
- Touch control panel
- Remote control available
- All LED technology
- Safety thermal cut-off device
- Flame can be used with or without water

Model No.	Heat Power	Product Size (mm)	Packing Size (mm)	N.W.(Kg)	G.W.(Kg)
YL-SL50B	900W/1800W for 220V-240V/50Hz; 750W/1500W for 120V/60Hz	1318×151×438	1368×195×495	27.8	32.3

INSERT SERIES



YL-EF26/YL-EF28



- 26" & 28" Insert Fireplace
- 3 pcs of infrad quartz heating
- Carbon log fuel effect, 3 colour flame and log colour
- Flat tempered glass front panel
- LED lights
- Alternative manual control panel
- With digital led display
- Adjustable temperature settings from 62°F to 82°F (17°C-28°C)
- Timer offers automatic shut off from 1H to 6H
- Adjustable flame brightness (L1 to L6)
- Two sides with fake brick-wall decoration
- Remote control
- With safety cut-off device

Modle No.	Heat Power	Product Size (mm)	Packing Size (mm)	N.W.(Kg)	G.W.(Kg)
YL-EF26	900W/1800W for 220V-240V/50Hz;	643×236×473	705×295×550	13.9	15.8
YL-EF28	750W/1500W for 120V/60Hz	732×236×523	790×295×550	16.3	18.3

YL-WF2613L

- 26" Insert Fireplace
- Curved front panel
- Resin log fuel bed provide vivid effect
- Two-side brick wall design and deep coal bed
- All led technology
- Adjustable timer settings from 1H to 9H
- With LED digital display
- Alternative manual control panel
- Remote control
- Adjustable flame and fuelbed brightness (L1 to L9)
- Adjustable temperature settings from 65°F to 95°F (18°C-35°C)
- Safety thermal cut-off device



Modle No.	Heat Power	Product Size (mm)	Packing Size (mm)	N.W.(Kg)	G.W.(Kg)
YL-WF2613L	900W/1800W for 220V-240V/50Hz; 750W/1500W for 120V/60Hz	704×229×539	735×246×608	16.5	18.5

YL-F2325A/YL-F2625A

- 23" & 26" Insert Fireplace
- Flat front panel
- Resin log fuel bed provided vivid effect
- Two-side brick wall design and deep coal bed
- All led technology
- Adjustable timer settings from 1H to 9H
- With LED digital display
- Alternative manual control panel
- Remote control
- Adjustable flame and fuelbed brightness (L1 to L9)
- Adjustable temperature settings from 65°F to 95°F (18°C-35°C)
- Safety thermal cut-off device



Modle No.	Heat Power	Product Size (mm)	Packing Size (mm)	N.W.(Kg)	G.W.(Kg)
YL-F2325A	900W/1800W for 220V-240V/50Hz;	651×170×542	685×210×590	11	12.7
YL-F2625A	750W/1500W for 120V/60Hz	710×170×542	750×210×590	12	13.8

YL-ZCR3843

- Insert Fireplace
- Carbon fuel effect
- Flat steel and tempered glass for front panel
- LED lights
- Alternative manual control panel
- With digital led display
- Timer setting from 1H to 8H
- Remote control
- With safety cut-off device
- Adjustable temperature settings from 62°F to 82°F (17°C-28°C)
- Adjustable flame brightness (L1 to L5)
- With burning sound



Modle No.	Heat Power	Product Size (mm)	Packing Size (mm)	N.W.(Kg)	G.W.(Kg)
YL-ZCR3843	900W/1800W for 220V-240V/50Hz; 750W/1500W for 120V/60Hz	737×254×485	805×310×558	18.9	21.5

YL-F2625

- 26" Insert Fireplace
- Curved front panel
- Resin log fuel bed provide vivid effect
- Two-side brick wall design and deep coal bed
- All led technology
- Adjustable timer settings from 1H to 8H
- Remote control
- With LED digital display
- Alternative manual control panel
- Adjustable temperature settings from 62°F to 82°F (17°C-28°C)
- Adjustable flame and fuelbed brightness (L1-L5)
- Safety thermal cut-off device



Modle No.	Heat Power	Product Size (mm)	Packing Size (mm)	N.W.(Kg)	G.W.(Kg)
YL-F2625	900W/1800W for 220V-240V/50Hz; 750W/1500W for 120V/60Hz	697×197×535	745×240×580	14.6	15.9



YL-EF23A

- 23" Insert fireplace
- Curved front panel
- Resin log fuel bed provide vivid effect
- Two-side brick wall design and deep coal bed
- All LED technology
- With LED digital display
- Alternative manual control panel
- Adjustable timer settings from 1H to 8H
- Adjustable flame and fuelbed brightness (L1 to L5)
- Adjustable temperature settings from 62°F to 82°F(17°C-28°C)
- Remote control
- Safety thermal cut-off device



Model No.	Heat Power	Product Size (mm)	Packing Size (mm)	N.W.(Kg)	G.W.(Kg)
YL-EF23A	900W/1800W for 220V-240V/50Hz; 750W/1500W for 120V/60Hz	637×205×502	690×240×560	13.5	14.7

YL-EF26D

- 26" Insert fireplace
- Log flame effect
- Flat front panel
- Adjustable flame brightness
- Alternative manual control panel
- LED lights
- Remote control
- Rubber feet
- Safety thermal cut-off device



Model No.	Heat Power	Product Size (mm)	Packing Size (mm)	N.W.(Kg)	G.W.(Kg)
YL-EF26D	900W/1800W for 220V-240V/50Hz; 750W/1500W for 120V/60Hz	724×145×534	805×195×620	10	12.7

YL-F2625U

- 26" Insert Fireplace
- Carbon log fuel effect
- Curved front panel
- Two-sides brick wall design and deep coal bed
- LED lights
- Alternative manual control panel
- With digital led display
- Two heat settings
- Adjustable flame brightness (L1 to L5)
- Coal bed and flame with 3 changable led colour(orange, blue, red)
- Timer offers automatic shut off from 1 H to 6 H
- Adjustable temperature settings from 62°F to 82°F
- Remote control
- With safety cut off device



Model No.	Heat Power	Product Size (mm)	Packing Size (mm)	N.W.(Kg)	G.W.(Kg)
YL-F2625U	900W/1800W for 220V-240V/50Hz; 750W/1500W for 120V/60Hz	693×215×540	724×248×587	12.5	14

YL-EF26B

- 26" Insert Fireplace
- Curved front panel
- Resin log fuel bed provide vivid effect
- All led technology
- With LED digital display
- Alternative manual control panel
- Remote control
- Adjustable timer settings from 1H to 8H
- Adjustable flame and fuelbed brightness (L1 to L5)
- Adjustable temperature settings from 62°F to 82°F(17°C-28°C)
- Safety thermal cut-off device



Model No.	Heat Power	Product Size (mm)	Packing Size (mm)	N.W.(Kg)	G.W.(Kg)
YL-EF26B	900W/1800W for 220V-240V/50Hz; 750W/1500W for 120V/60Hz	697×197×535	745×240×580	14.6	15.9

YL-EF23AKF

- 23 Insert Fireplace
- Log fuel effect
- Fat tempered glass front panel
- Adjustable flame brightness
- Alternative manual control panel
- With LED digital display
- Remote control for choice
- Adjustable timer settings from 1H to 8H
- Adjustable temperature settings from 62°F to 82°F(17°C-28°C)
- Adjustable flame and fuelbed brightness (L1 to L5)
- With safety cut-off device



Model No.	Heat Power	Product Size (mm)	Packing Size (mm)	N.W.(Kg)	G.W.(Kg)
YL-EF23AKF	900W/1800W for 220V-240V/50Hz; 750W/1500W for 120V/60Hz	600×215×434	762×300×550	12.6	15.3



YL-10AP1



- Electric Heater
- Log flame effect
- Manual touch switch on fire
- Flame effect can be used independently of heat
- Safety thermal cut -off device
- Fan heater with choice of 2 heat settings

Model No.	Heat Power	Product Size (mm)	Packing Size (mm)	N.W.(Kg)	G.W.(Kg)
YL-10AP1	600W/1200W for 220V-240V/50Hz; 600W/1200W for 120V/60Hz	135×210×360	170×240×390	1.7	2.1

YL-EF22PM



- Electric Stove
- Log fuel effect
- two door decoration
- Adjustable flame brightness
- Two heat settings
- Manual control
- With tip-over switch
- Safety cut-off device
- Flame can be operated with or without heat

Model No.	Heat Power	Product Size (mm)	Packing Size (mm)	N.W.(Kg)	G.W.(Kg)
YL-EF22PM	900W/1800W for 220V-240V/50Hz; 750W/1500W for 120V/60Hz	590×291×639	632×342×685	17	18

YL-EF22



- Electric Stove
- Black or white color for your choice
- LED lights
- Log fuel effect
- Two heat settings
- Manual control
- With tip-over switch
- Safety cut-off device
- Flame can be operated with or without heat

Model No.	Heat Power	Product Size (mm)	Packing Size (mm)	N.W.(Kg)	G.W.(Kg)
YL-EF22	900W/1800W for 220V-240V/50Hz; 750W/1500W for 120V/60Hz	381×270×562	439×315×569	8.6	11.4



YL-EF22A



- Electric Stove
- LED lights
- Log fuel effect
- two door decoration
- Adjustable flame brightness
- Two heat settings
- Manual control
- With tip-over switch
- Safety cut-off device
- Flame can be operated with or without heat

Model No.	Heat Power	Product Size (mm)	Packing Size (mm)	N.W.(Kg)	G.W.(Kg)
YL-EF22A	900W/1800W for 220V-240V/50Hz; 750W/1500W for 120V/60Hz	430×310×550	486×353×595	9.7	11

YL-EF22P



- Electric Stove
- LED lights
- Log fuel effect
- one door decoration
- Adjustable flame brightness
- Two heat settings
- Manual control
- With tip-over switch
- Safety cut-off device
- Flame can be operated with or without heat

Model No.	Heat Power	Product Size (mm)	Packing Size (mm)	N.W.(Kg)	G.W.(Kg)
YL-EF22P	900W/1800W for 220V-240V/50Hz; 750W/1500W for 120V/60Hz	430×230×515	460×260×515	7.5	8.5

YL-SF1318



- Electric Stove
 - Log flame effect
 - Flat front
 - Black iron effect finish
 - Flame effect can be used independently
 - 2 heat settings option
 - Safety thermal cut-off device
 - Attractive 3-sided open design for full view
 - With tip over switch
- Flame can be operated with or without heat

Modle No.	Heat Power	Product Size (mm)	Packing Size (mm)	N.W.(Kg)	G.W.(Kg)
YL-SF1318	900W/1800W for 220V-240V/50Hz; 750W/1500W for 120V/60Hz	590×291×639	632×342×685	17	18

YL-SF25



- Electric Stove
- LED lights
- One door can be opened
- The tempered glass on both sides and fixed on door
- Adjustable flame brightness
- Manual control
- Safety thermostat cut off device
- Flame effect can be used independently
- Top & bottom & door & feet is plastic material.
- Body is metal material

Modle No.	Heat Power	Product Size (mm)	Packing Size (mm)	N.W.(Kg)	G.W.(Kg)
YL-SF25	900W/1800W for 220V-240V/50Hz; 750W/1500W for 120V/60Hz	535×280×600	615×380×613	12.8	14.8

YL-SF23



- Electric Stove
- LED lights
- Curved front
- Carbon log fuel effect
- The iron wire mesh fixed on door
- Adjustable flame brightness
- Manual control
- Safety thermostat cut off device
- Attractive 3 sided open design for full view
- With tip over switch
- Flame can be operated with or without heat

Modle No.	Heat Power	Product Size (mm)	Packing Size (mm)	N.W.(Kg)	G.W.(Kg)
YL-SF23	900W/1800W for 220V-240V/50Hz; 750W/1500W for 120V/60Hz	585×280×559	627×317×525	10.4	14.5

YL-SF25C



- Electric Stove
- Two door can be opened
- The tempered glass on both sides of the door
- Adjustable flame brightness
- Manual control
- Safety thermostat cut-off device
- Attractive 3-sided open design for full view
- Flame effect can be used independently
- Top & bottom & door & feet is plastic
- Body is metal
- With tip over switch

Modle No.	Heat Power	Product Size (mm)	Packing Size (mm)	N.W.(Kg)	G.W.(Kg)
YL-SF25C	900W/1800W for 220V-240V/50Hz; 750W/1500W for 120V/60Hz	535×280×600	615×380×613	12.8	14.8

